TECHNICAL EXCELLENCE. SINCE 1929.

HOSE REELS

SERIE 805

ART. 805/10 FLEX

Hose length (m)
15

Hose internal diameter (mm)
10 mm (3/8")

Tube type
FLEX

Maximum pressure
15 bar

ISO EN 12100 | 2006/42/CE | CE | TÜVNORD Baumuster geprüft | 20 | mm 430x400x210

TECHNICAL DATA

Article	Hose internal diameter (mm)	Hose length (m)	Cut length (m)	Maximum pressure	End fitting	Temperature	Incoming connection	Tube type	Color	Tube colour	Fluid type
805/10 FLEX	10 mm (3/8")	15	1.5	15 bar	3/8" M BSP	-5°C/+60°C	NO	FLEX	BLUE	LIGHT BLUE	Air - Water

Please note: The images are for illustrative and explanatory purposes only

OVERALL DIMENSIONS

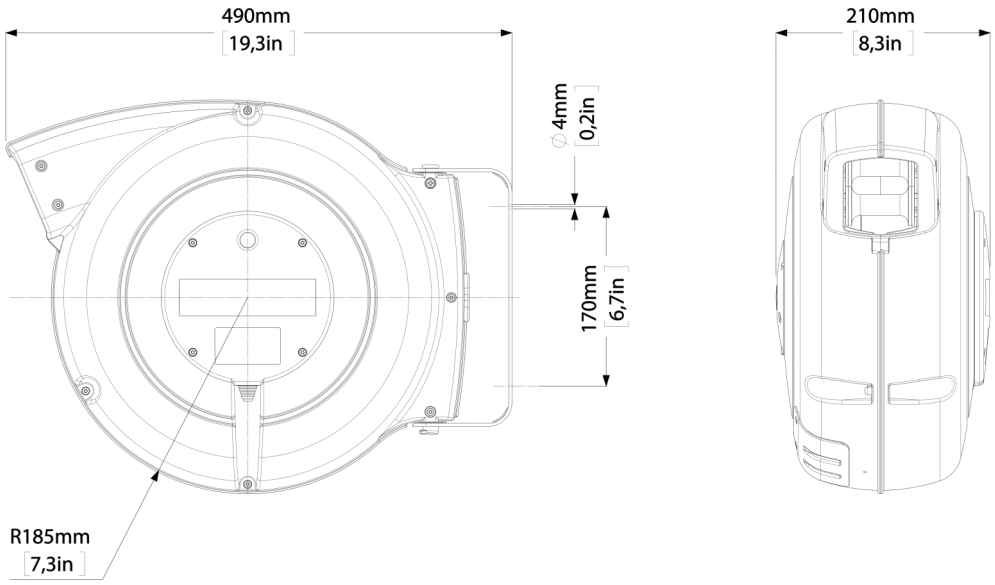

Technical features

- Available with KPU and FLEX hose.
- Technopolymer structure.
- Leda spotlight
- Automatic device to stop the tube at the desired length, which can be disconnected if necessary.
- Available in yellow or silver gray color.

Please note: The images are for illustrative and explanatory purposes only

OPTIONAL ACCESSORIES AND SPARE PARTS

ART. 805/SR

Safety Return

Safety Return allows the slow rewinding of the cable avoiding dangerous repercussions in case the cable gets out of hand to the operator.



ART. 949/805-7000

Dispositivo antirotazione

Dispositivo opzionale per rendere fisso, anziché orientabile l'avvolgitubo. Indispensabile per l'applicazione a soffitto.

Please note: The images are for illustrative and explanatory purposes only